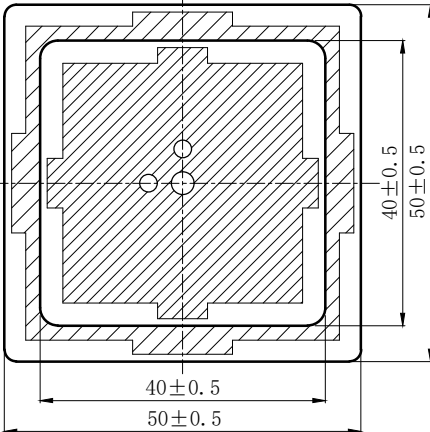
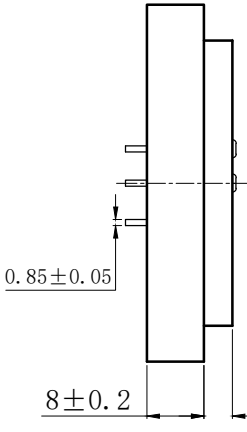
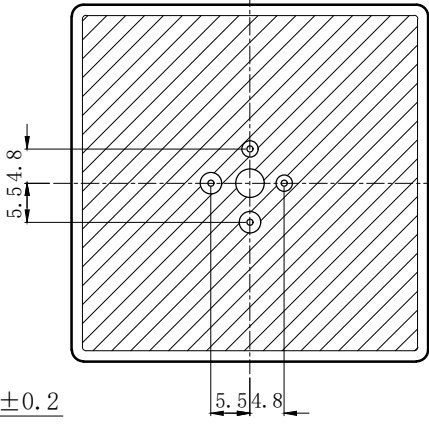


石家庄市麦特思电子科技有限公司

产品规格书

Product Specification

品名Part Name		介质天线	规格Spec.		MPA1375S4050T120A1	批号Lot No.	
客户Customer			客户料号Material No.			数量Quantity	
电性能指标 Electrical Specifications							
项目 Item			项目规格Spec			单位Unit	
1	频率 Frequency		1575.42±3	1227.6±3	1176±3	MHz	
2	回波损耗 Return Loss (at Center Frequency)		10min			dB	
3	特性阻抗 Impedance		50±5	40±10		Ω	
4	电压驻波比 VSWR		<2				
5	极化方式 Polarization		R. H. C. P				
6	顶点增益 Gain at Zenith		3.0	>0		dB	
7	轴比 Axial Ration		<3	<5		dB	
8	操作温度范围 Operation Temperature Range		-40 to +85			℃	
9	接地板 Ground Plane		70*56			mm	
外形尺寸 Dimensions							
 Top  Side  Ground General tolerance:±0.2 Unit: mm							




制作Written: 周世辉

检查Checked: 高俊伟




批准Approved: 王明哲

2025. 5. 20

MPA1375S4050T120A1

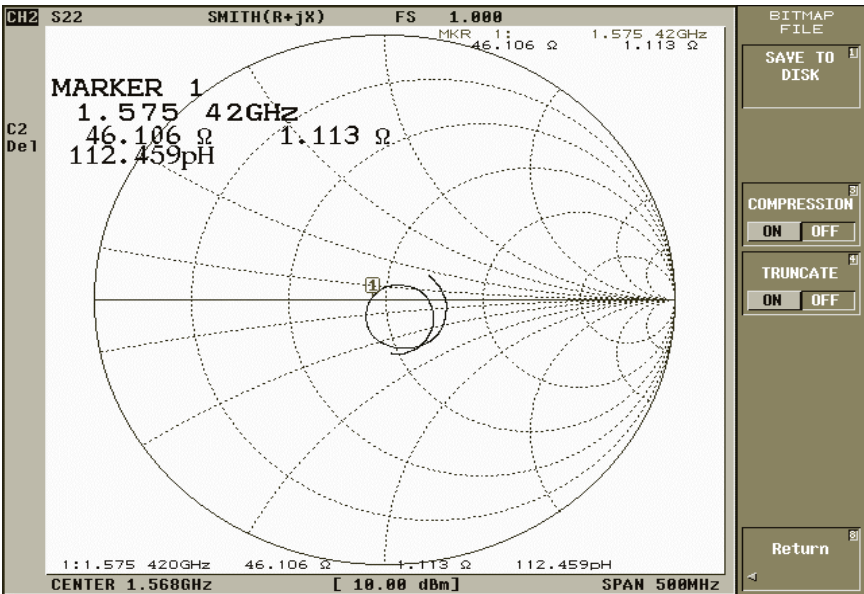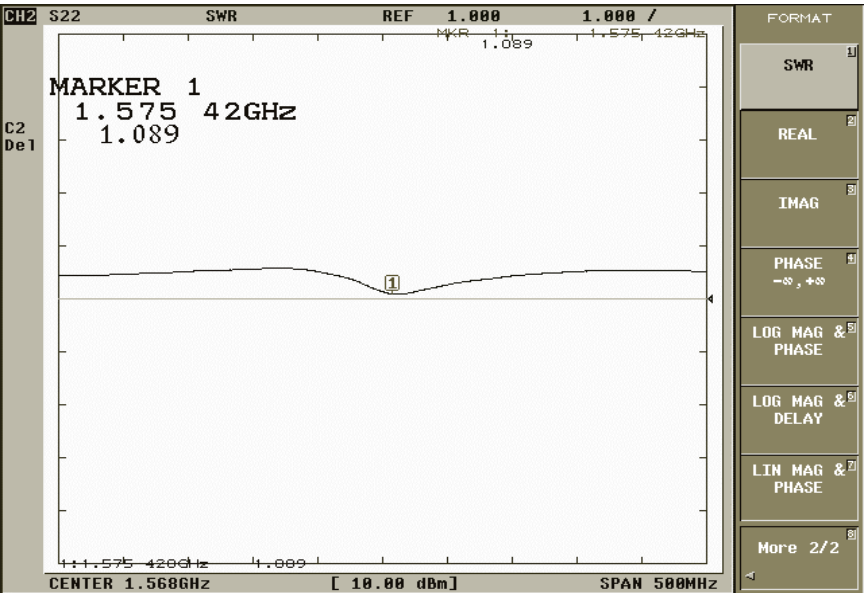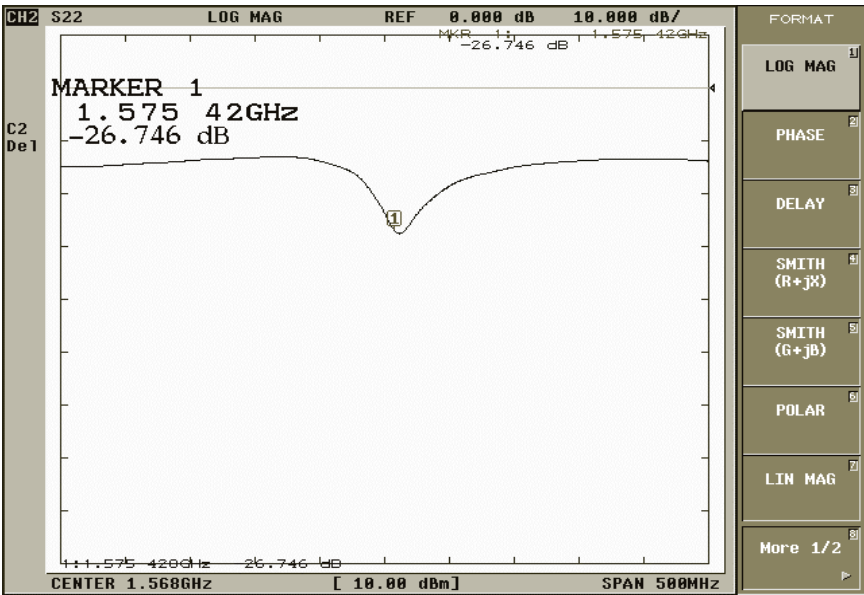

MPA1375S4050T120A1

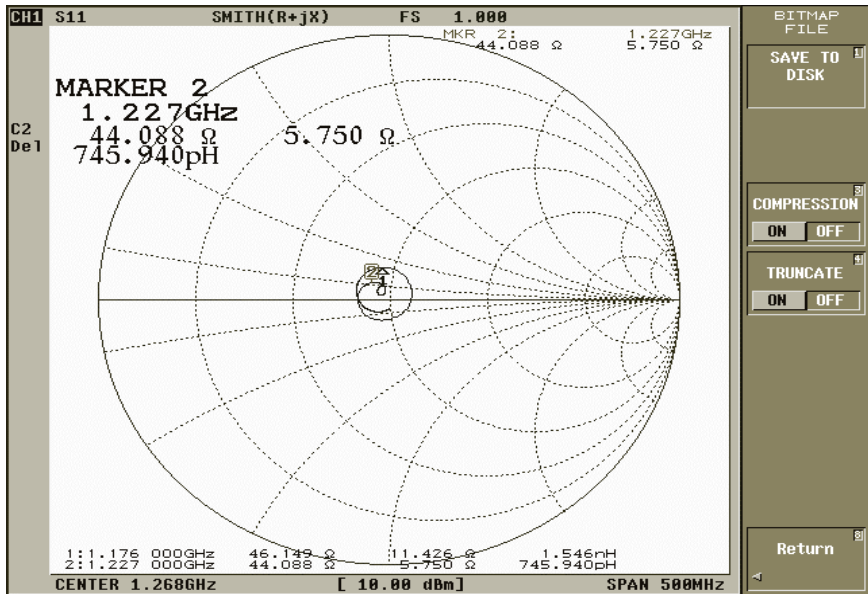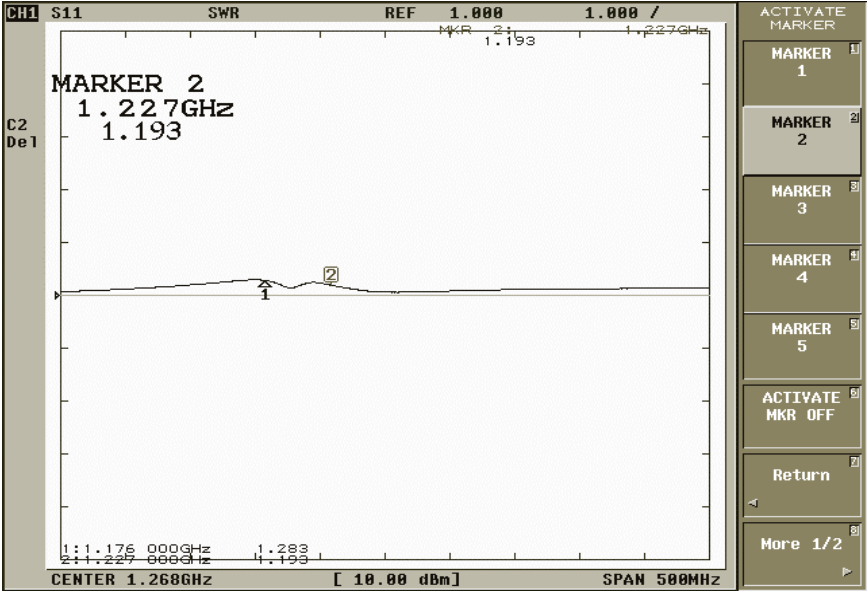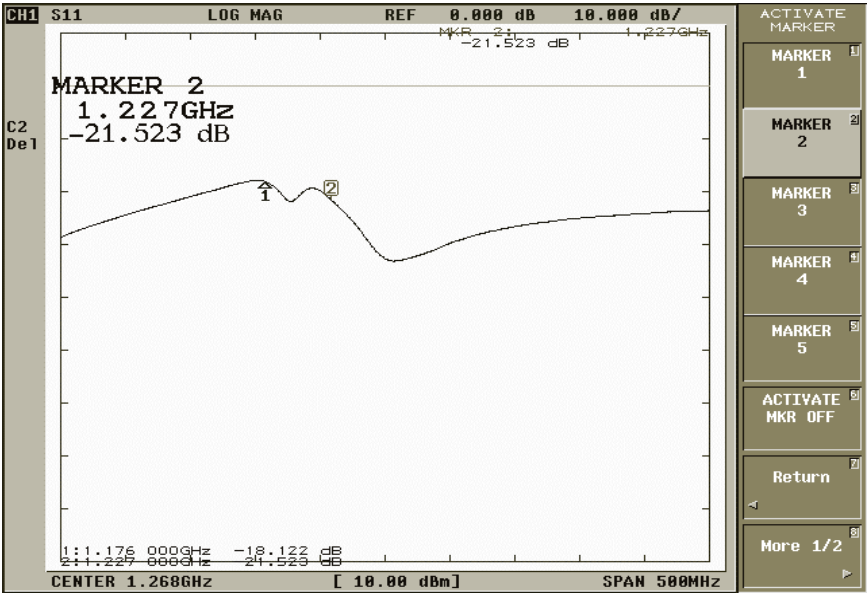

MPA1375S4050T120A1

