




石家庄市麦特思电子科技有限公司

产品规格书

Product Specification




品名Part Name		介质天线		规格Spec.		MPA2053S1520T130B1		批号Lot No.			
客户Customer				客户料号Material No.				数量Quantity			
电性能指标 Electrical Specifications											
项目 Item				项目规格Spec				单位Unit			
1	频率 Frequency			1615±3		2491±3		MHz			
2	回波损耗 Return Loss (at Center Frequency)			10 min				dB			
3	特性阻抗 Impedance			50±5				Ω			
4	电压驻波比 VSWR			<2							
5	极化方式 Polarization			L. H. C. P		R. H. C. P					
6	顶点增益 Gain at Zenith			>-0.4		>-0.5		dB			
7	轴比 Axial Ration			—		—		dB			
8	操作温度范围 Operation Temperature Range			-40 to +85				℃			
9	接地板 Ground Plane			53*22				mm			
外形尺寸 Dimensions											
 Top  Side  Ground General tolerance:±0.2 Unit: mm											

制作Written:周世辉

检查Checked: 高俊伟

批准Approved: 王明哲 2025. 6. 5

MPA2053S1520T130B1

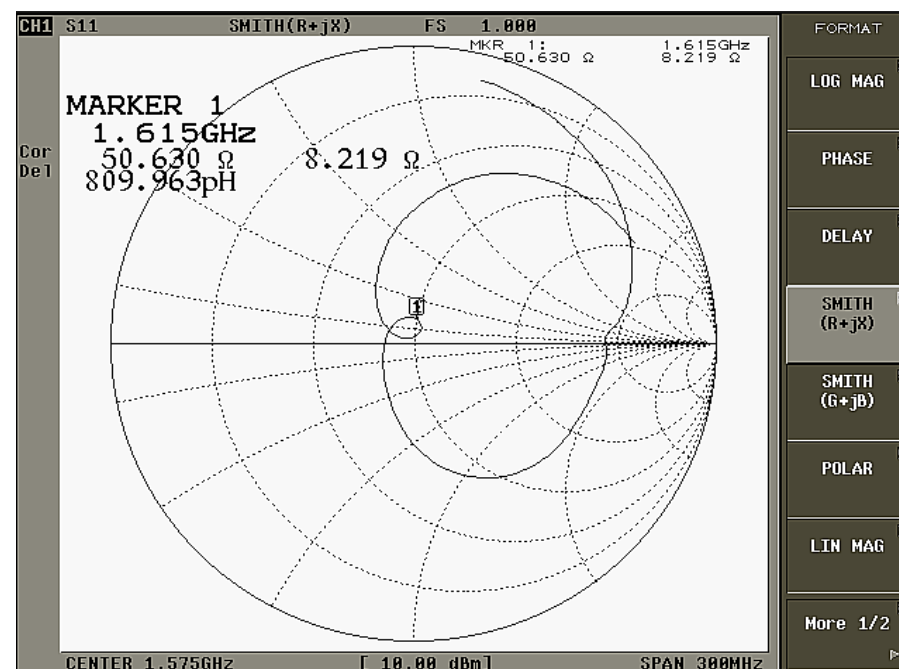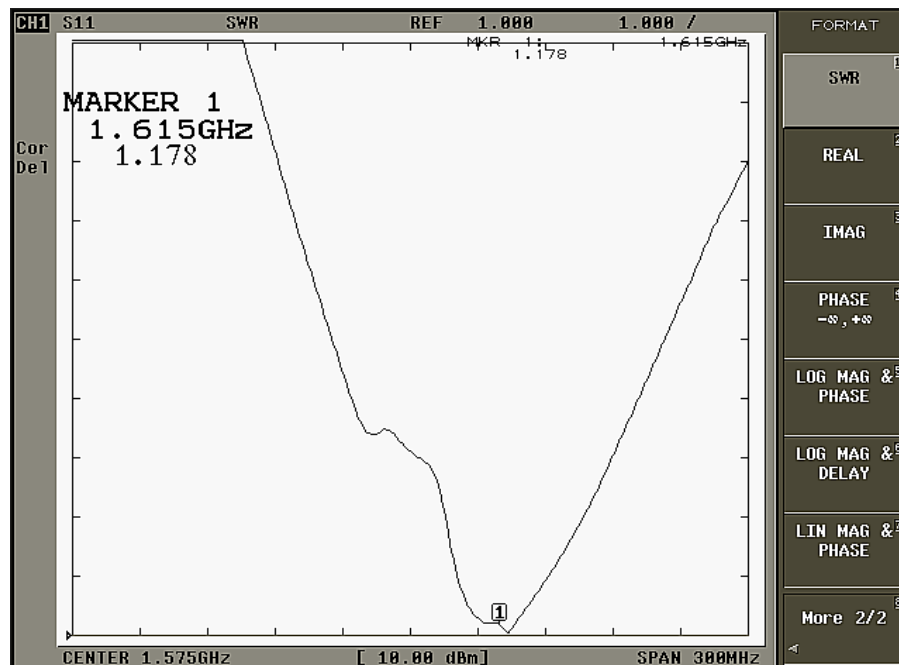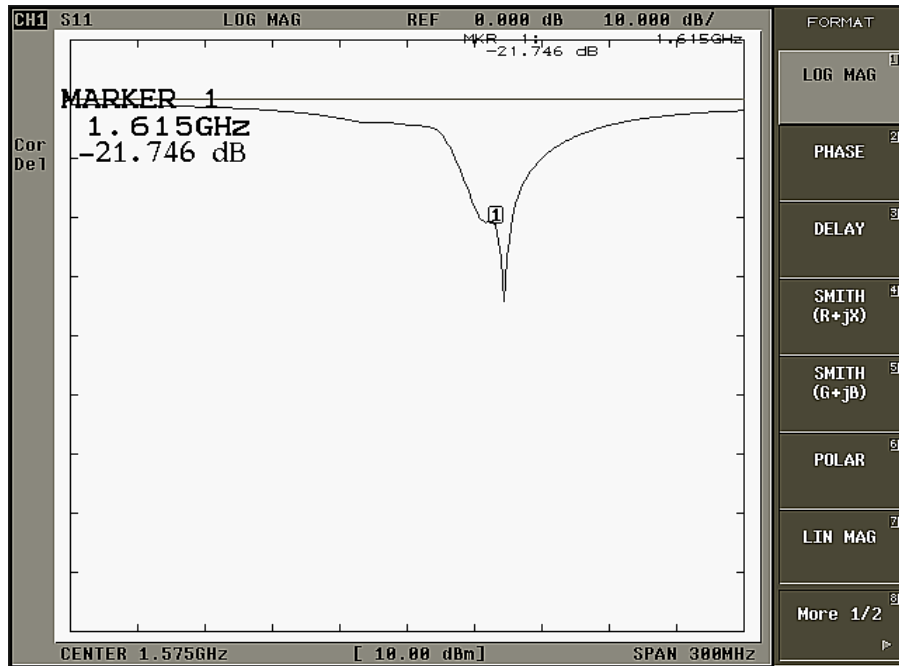

MPA2053S1520T130B1

